

GUIDE

ADD A REMOTE CONTROL

If you have a self-learning 433,92 MHz device already installed and want to use a remote control with it, here's how!

LET'S GET STARTED!

YOU WILL NEED






WALL SOCKET RECEIVER

TELLSTICK NET/NET V2/
ZNET LITE V2

REMOTE CONTROL



Note! TellStick ZNet Lite V1 is not compatible with this method. If the label on the back of your TellStick ZNet Lite does not show "V2", you have V1.

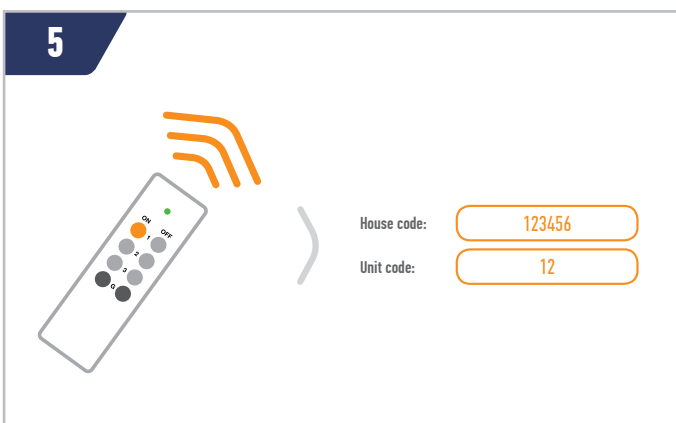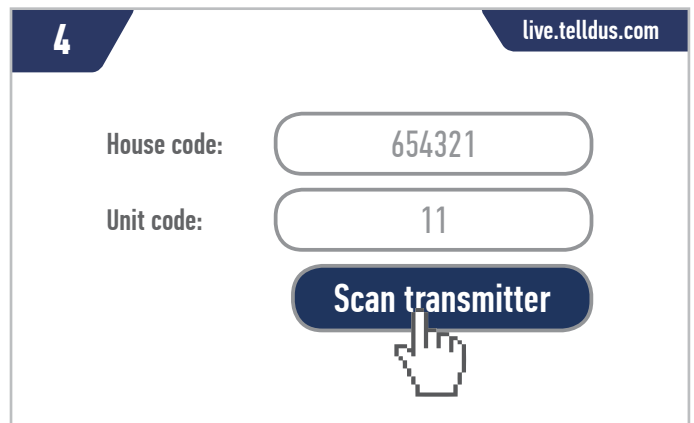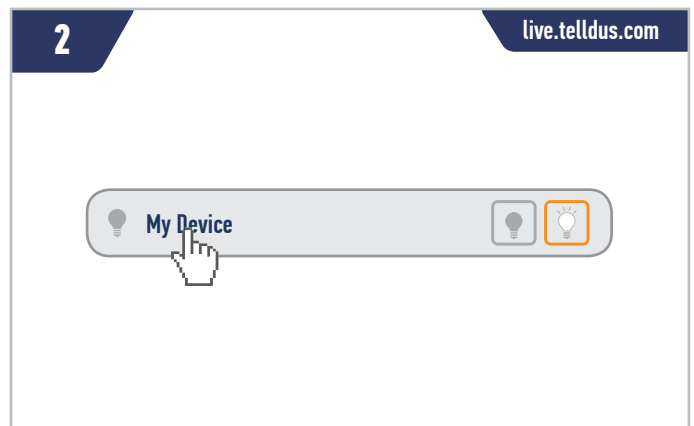



Note! This guide is for 433,92 MHz self learning devices only. If you have 433,92 MHz code switch devices and remote you can manually set the code on the remote, please refer to the manual for configuration. If you have a Z-Wave remote control and devices you can control devices by association.