

GUIDE

ADD A REMOTE CONTROL

If you have a self-learning 433,92 MHz device already installed and want to use a remote control with it, here's how!

LET'S GET STARTED!


YOU WILL NEED

-  WALL SOCKET RECEIVER
-  REMOTE CONTROL

1 live.telldus.com



2 live.telldus.com

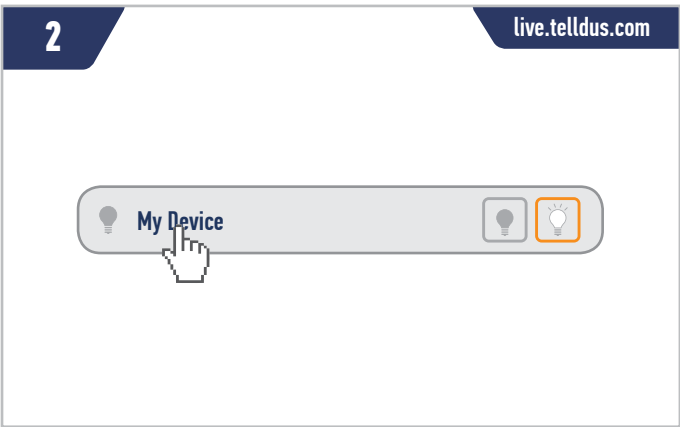

3 live.telldus.com




4 live.telldus.com


House code:

Unit code:

Scan transmitter

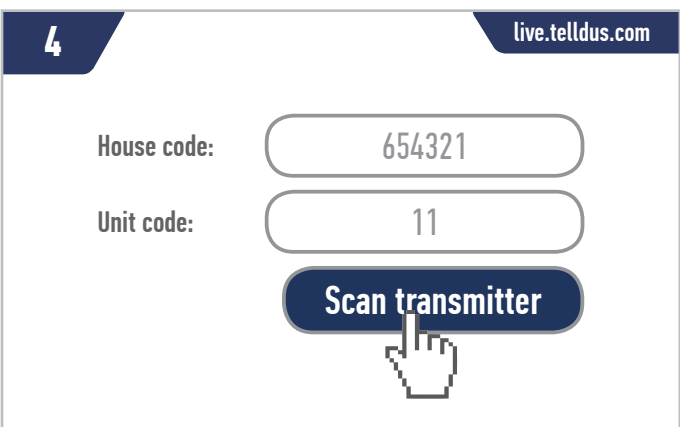

5

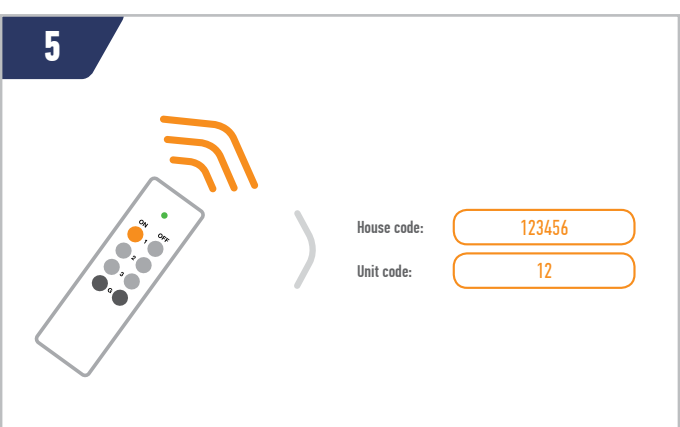

House code:

Unit code:

6 live.telldus.com

Stop scanning





Note! This guide is for 433,92 MHz self learning devices only. If you have 433,92 MHz code switch devices and remote you can manually set the code on the remote, please refer to the manual for configuration. If you have a Z-Wave remote control and devices you can control devices by association.